


# MOTO-A Dimensions and Features


## lowest arm and platform position

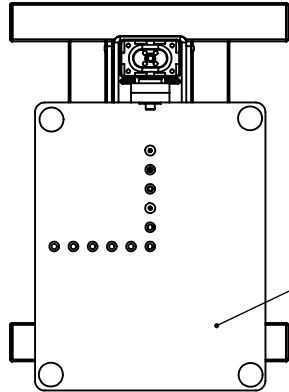


Platform can be rotated 90° so that width and depth are interchangeable

Bluedot pads are provided for between the stand and the speaker

The Sound Anchor MOTO-A lifting column has 25.5" of travel.

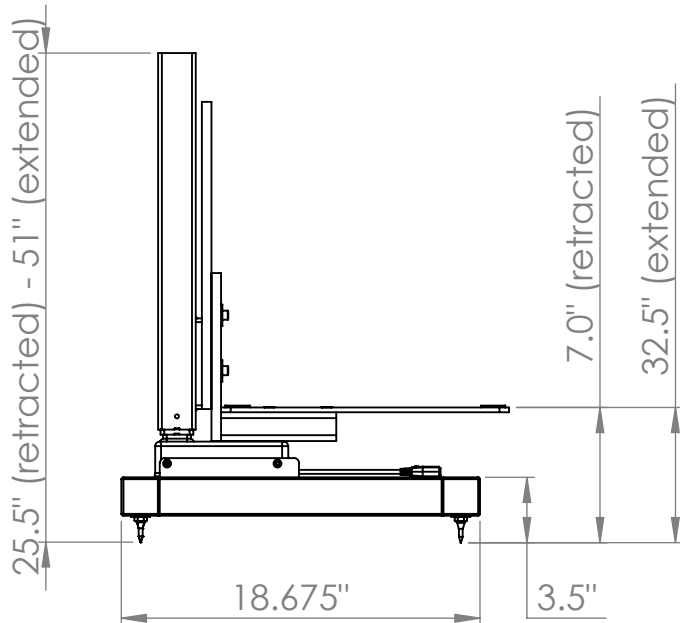

Carpet piercing spikes are provided with the stands  
Floor protection devices are available.

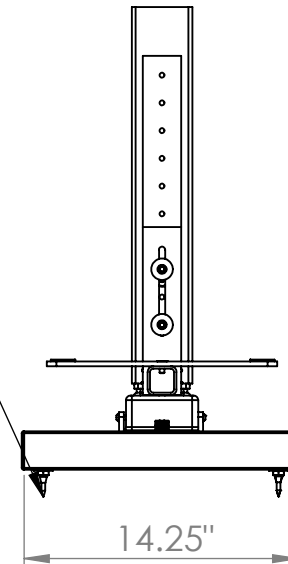

# MOTO-A Dimensions and Features highest arm and platform position

